


2. Cable 1/4-inch in diameter or less shall use heat shrinkable sleeving (MIL-I-23053/5) per paragraph 3.5.2 and 3.5.3.
3. Coaxial cables shall have required marking per paragraph 3.5.2 and 3.5.3 on heat shrinkable tubing (MIL-I-23053/5).

b. Marking Samples. The cable or wire identification marking and typical terminal end markings are shown in the following samples:

1. Cable with one end connecting to a unit and the other end to an external power source.

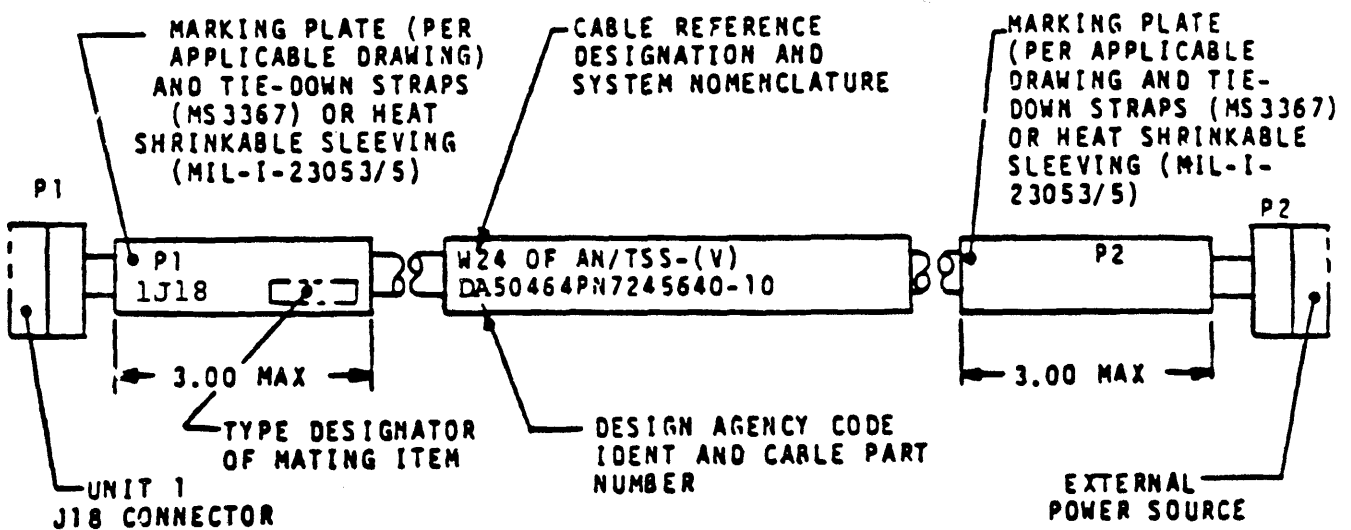

2. Cable with one end connecting to an in line cable connector and the other end with wires to be connected to connector pins on a unit.

